


# 582426 (L-VWP06C/EN)

6 W Cabinet Loudspeaker

- Stylish and compact wall mounting speaker
- Sturdy housing made of UV-resistant ABS plastic acc. ul94v0
- Front cover made of sturdy, perforated metal sheet
- Simple and time-saving assembly and installation
- Quick and clear adjustment of the loudspeaker power
- Approval according to EN54-24

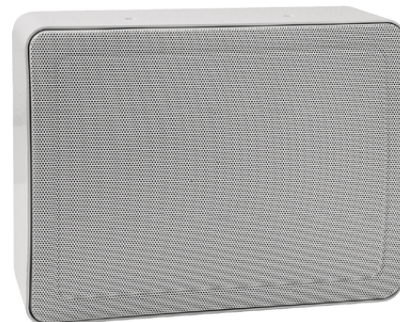


## General

This loudspeaker is a high performance 6 W voice alarm cabinet loudspeaker. It provides a broad frequency response range. Low distortion and high sound pressure level for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction. It is ideal for sound distribution in various types of commercial buildings. It's low profile white color design blends easily with most interiors in locations such as hotels, conference rooms, cinemas, factories and exhibitions.

## Mounting

The loudspeaker is designed for quick and simple installation. First mount the back on the wall or on the junction box using the screws slots. Cable glands on the rear and on the side.

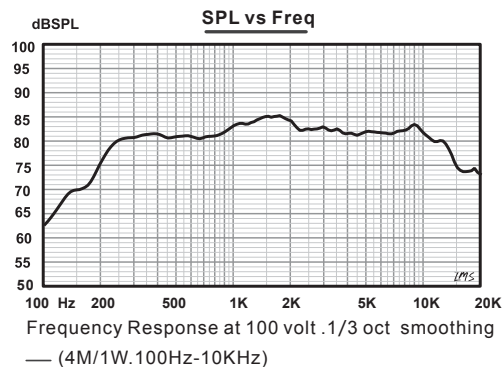


Frequency Response

		Horizontal	Vertikal
1 oktave pink noise	500 Hz	180 °	180 °
1 oktave pink noise	1 kHz	180 °	180 °
1 oktave pink noise	2 kHz	115 °	119 °
1 oktave pink noise	4 kHz	91 °	82 °

Dispersion angles

## Power setting

There are three primary taps including 6W, 3W, 1.5W for your selection. The cable connector is mounted on the back cover for easy installation.

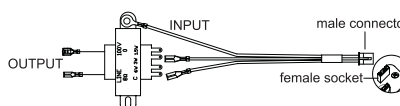


Cable configuration

**EN 54-24**

# 582426 (L-VWP06C/EN) Technical Specifications

TECHNISCHE DATEN	
RATED POWER	6 W
TRANSFORMER POWER TAPS	6 / 3 / 1,5 W (100 V) • 3 / 1,5 / 0,75 W (70 V)
RATED IMPEDANCE	1,67 kΩ / 3,33 kΩ / 6,67 kΩ
SPL 1 W / 1 M	92 dB
TRANSMISSION RANGE	150 ... 16.000 Hz (-10 dB)
AMBIENT TEMPERATURE	-25 °C ... 55 °C
STORAGE TEMPERATURE	-40 °C ... 70 °C
AIR HUMIDITY	< 95 % non condensing
MATERIAL	ABS
COLOR	white, similar to RAL 9010
WEIGHT	ca. 1,6 kg
DIMENSIONS	W: 260 mm H: 200 mm D: 88 mm
ORDER INFORMATION	PART NO.
6 W CABINET LOUDSPEAKER L-VWP06C/EN	582426

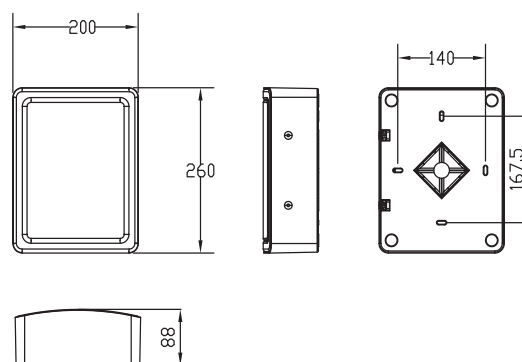

Dimensions

## Germany

Phone: +49 2131 40615-600  
 Fax: +49 2131 40615-606  
 info@esser-systems.com

## UK

Phone: +44 (0) 116 246 2000  
 Fax: +44 (0) 116 246 2300  
 hlsuksalessupport@honeywell.com

## Austria

Phone: +43 1 600 6030  
 Fax: +43 1 600 6030-900  
 hls-austria@honeywell.com

## France

Phone: +33 810 10 66 10  
 Fax: +33 474 94 51 18  
 www.esser-systems.com/fr

## The Netherlands

Phone: +31 (0)73 2060 300  
 info@esser-systems.nl

## Benelux

Phone: +32 (0)4 2470300  
 Phone: +31 (0)73 6273273  
 hls-benelux@honeywell.com

## Norway

Phone: +47 32 24 48 00  
 fire.safety@honeywell.com

All technical data is correct at time of publication and is subject to change without notice.

D800048.GO | 10/17

© 2017 Honeywell International Inc.

**Honeywell**