

# HEW2PER2 HEW4PER2 HEW4PER2B

Network WDR 2MP/4MP IR Ball Camera











OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive
IMAGE SENSOR	<b>HEW2PER2:</b> 1/2.8" 2 Megapixel progressive scan CMOS <b>HEW4PER2/HEW4PER2B:</b> 1/3" 4 Megapixel progressive scan CMOS
NUMBER OF PIXELS (H x V)	<b>HEW2PER2:</b> 1920(H) x1080(V) <b>HEW4PER2/HEW4PER2B:</b> 2688(H) x1520(V)
MINIMUM ILLUMINATION	<b>HEW2PER2:</b> 0.05lux/F1.4(color,30IRE) 0Lux/F1.4(IR on) <b>HEW4PER2/HEW4PER2B:</b> 0.3lux/F1.4(color,30IRE) 0Lux/F1.4(IR on)
S/N RATIO	More than 45dB
ELECTRONIC SHUTTER SPEED	1/3~1/100000s
IR DISTANCE	Up to 50m (164ft), depending on scene reflectance
IR LIGHT CONTROL	Manual/SmartIR/OFF
IR LIGHT NUMBER	2
DAY/NIGHT	Auto(ICR) / Color / B/W
BACKLIGHT COMPENSATION	BLC / HLC / WDR
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/Customized Region
GAIN CONTROL	0~100
WIDE DYNAMIC RANGE	120dB
NOISE REDUCTION	3D DNR
PRIVACY MASKING	Off / On (4 Areas, Rectangle)
MOTION DETECTION	Off / On (4 Zones, Rectangle)
REGION OF INTEREST	Off / On (4 Zones)
FACE DETECTION	NA
LENS	2.7mm~13.5mm, F1.4, Motorized
ANGLE OF VIEW	<b>HEW2PER2:</b> H:108°~30°, V:60°~18° <b>HEW4PER2/HEW4PER2B:</b> H:108°~28°, V:58°~16°
VIDEO	
VIDEO COMPRESSION	H.265/H.264H/Smart Codec/MJPEG (Sub Stream)
RESOLUTION	<b>HEW2PER2:</b> 1080P(1920x1080)/1.3M(1280x960)/720P(1280x720)/D1(704x480/576)/VGA(640x480)/CIF(352x240/288) <b>HEW4PER2/HEW4PER2B:</b> 4M(2688x1520)/3M(2304x1296)/1080P(1920x1080)/1.3M(1280x960)/720P(1280x720)/D1(704x480/576)/VGA(640x480)/CIF(352x240/288)
FRAME RATE	<b>HEW2PER2:</b> Main Stream: 1080P (1~25/30fps) Sub Stream: D1(1~25/30fps) <b>HEW4PER2/HEW4PER2B:</b> Main Stream: 4M(1~20fps) Sub Stream: D1(1~25/30fps)
BIT RATE CONTROL	CBR/VBR
BIT RATE	H.265: 12K ~ 6400Kbps H.264: 32K ~ 10240Kbps

NETWORK	
ETHERNET	RJ-45 (10/100Base-T)
SUPPORTED WEB BROWSERS	Internet Explorer (11.0+)
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit
PROTOCOLS*	HTTP; HTTPS; TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; DHCP; DNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; IEEE 802.1x; Multicast; ICMP; IGMP; TLS
INTEROPERABILITY	ONVIF Profile S/G/Q
MAXIMUM USERS ACCESS	20 Users
SECURITY	User account and password protection HTTPS, IP Filter, Digest authentication, User access log, TLS1.2 only, AES-128/256, SSH/Telnet closed, sFTP by default, PCIDSS compliance
EVENT	No SD card, SD card error, Capacity warning, Network disconnection, IP conflict, Illegal access
MICRO SD	Up to 128 GB microSDHC card, Class 10 (not included)
ELECTRICAL	
POWER SUPPLY	DC12V, PoE (IEEE802.3af) (Class 0)
POWER CONSUMPTION	<9.5W
MECHANICAL	
DIMENSIONS	Ø122mm x 102mm(4.8" x4.0")
PRODUCT WEIGHT	0.60Kg(1.32lb)
PACKAGE WEIGHT	0.75kg (1.65lb)
MATERIAL	Metal
CONSTRUCTION COLOR	<b>HEW2PER2/HEW4PER2:</b> RAL 9003 (White) <b>HEW4PER2B:</b> RAL 7022 (Grey)
ENVIRONMENTAL	
OPERATING TEMPERATURE	-30° C ~ +60° C (-22° F ~ +140° F)
RELATIVE HUMIDITY	Less than 95% RH
INGRESS PROTECTION	IP66
REGULATORY	
EMISSIONS	FCC Part 15B, EN55032
IMMUNITY	EN 50130-4
SAFETY	UL 60950-1, EN 62368-1
ROHS	EN 50581

\* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

# Network WDR 2MP/4MP IR Ball Camera

## RECOMMENDED ACCESSORIES


SYSTEM COMPATIBILITY		MOUNTS AND ACCESSORIES	
HEN*4	8/16/32/64-channel Performance Series 4K NVRs (H.264 and H.265)	HQA-WK	 Wall Mount Bracket (white)
HEN*3	4/8/16/32-channel Performance Series 4K NVRs (H.264 and H.265)	HQA-WKB	 Wall Mount Bracket (grey)
HEN*2	4/8/16-channel Performance Series NVRs (H.264)	HQA-PK**	 Pendant Mount Cap
HRHT4*	4/8/16-channel 4 MP HQA/IP/CVBS Hybrid DVRs (H.264)	HQA-CBE**	 Ceiling Mount Extend Bracket for HQA-CB
MOUNTS AND ACCESSORIES		HQA-CB**	 Ceiling Mount Bracket for Pendant Mount Cap
HQA-BB4**	 Dome/Eyeball Junction Box		
HQA-PM2**	 Pole Mount Adapter (white)		
HQA-PM2B**	 Pole Mount Adapter (grey)		

\*\* The HQA-BB4 must be used when installing the camera to HQA-PM2 or HQA-PM2B, vice versa.

The HQA-PK must be used when installing the camera to HQA-CB.

The HQA-CBE must be used with HQA-CB together.

## DIMENSIONS

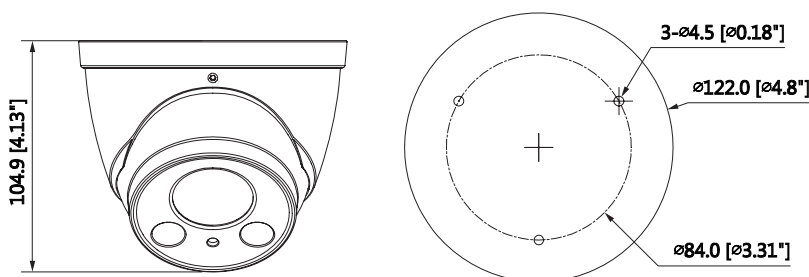

## ORDERING

HEW2PER2	Network WDR 2MP IR Ball Camera, 1/2.8" CMOS, 2.7mm~13.5mm Motorized, 2 IR LEDs, PoE, IP66, H.265/H.264/Smart Codec, White
HEW4PER2	Network WDR 4MP IR Ball Camera, 1/3" CMOS, 2.7mm~13.5mm Motorized, 2 IR LEDs, PoE, IP66, H.265/H.264/Smart Codec, White
HEW4PER2B	Network WDR 4MP IR Ball Camera, 1/3" CMOS, 2.7mm~13.5mm Motorized, 2 IR LEDs, PoE, IP66, H.265/H.264/Smart Codec, Grey

### For more information

[www.honeywell.com/security](http://www.honeywell.com/security)

### Honeywell Commercial Security

Aston Fields Road  
Whitehouse Industrial Estate  
Runcorn, Cheshire  
WA7 3DL  
Tel: +44 (0)8448 000 235

### Honeywell Security Office -

Emaar Business Park, Sheikh Zayed Road  
Building No. 2, 2nd floor, 201  
Post Office Box 232362  
Dubai, United Arab Emirates  
Tel: +971 44541704  
[www.honeywell.com](http://www.honeywell.com)

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-HEWxPER2x-01-UK(0119)DS-E  
© 2019 Honeywell International Inc.

**Honeywell**