

MCP-3165


CONVENTIONAL MANUAL CALL POINT RESETTABLE

MCP-3165 is designed to be connected to any brand of conventional fire detection and Intruder alarm systems. Internal 470-ohm resistance allow ease of installation. It is suitable for flush and surface mounting. An optional transparent protective cover can be installed. It is easily resettable via special key. Elegant design fits any environment.




GENERAL FEATURES

- EN 54-11 Certified
- Resettable
- NC/NO Selection
- Includes 470 Ohm resistance, does not require additional connection
- Transparent protection cover can be installed. Cover can be sealed
- Suitable for flush and surface mounting
- 5-30 VDC supply
- Compatible with all conventional fire and theft alarm systems



CVMCP-3165 TRANSPARENT PROTECTIVE COVER

The cover is made of robust poly-carbon transparent material. It is used to prevent accidental button activation.

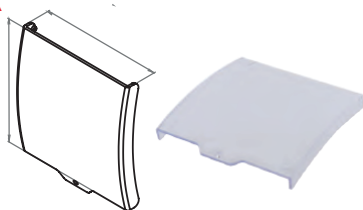

TECHNICAL SPECIFICATIONS

| MCP-3165 Technical Specifications | |
|-----------------------------------|--------------------------|
| Standard | EN 54-11 |
| Operating Type | A Type Manual |
| Relay | NC/NO/470R |
| Resettable | Yes |
| Power | 5-30 VDC |
| Weight | 165gr. |
| Dimensions (mm) | 86x55x88mm |
| Body Material and Color | RAL3001 RED |
| Cable Type | 0,4mm ~ 2,0mm |
| Type of Fragile Element | Resettable Polycarbonate |
| Operating Temperature | -10°C ~ 60°C |
| Humidity | ≤93% RH at +40°C |
| Protection Class | IP30 |

Honeywell Fire

Emaar Business Park, Sheikh
Zayed Road Building No. 2, 2nd
Floor, 201. PO. Box 232362
Dubai, United Arab Emirates
Tel: +971 44541704

For more information
www.honeywell.com

© 2020 Honeywell International Inc.

Honeywell